




4.5.1 Cache and Virtual Memory

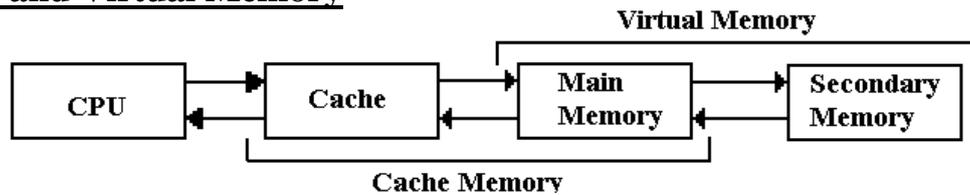

The design goal for cache memory is to create a memory unit with the performance of SRAM, but the cost and packaging density of DRAM. In the cache memory strategy, a fast (but small) SRAM memory fronts for a larger and slower DRAM memory. The reason that this can cause faster program execution is due to the **principle of locality**, first discovered by Peter J. Denning as part of his research for his Ph.D. The usual citation for Denning's work on program locality is his ACM paper [R78].

The basic idea behind program locality is the observed behavior of memory references; they tend to cluster together within a small range that could easily fit into a small cache memory. There are generally considered to be two types of locality. **Spatial locality** refers to the tendency of program execution to reference memory locations that are clustered; if this address is accessed, then one very near it will be accessed soon. **Temporal locality** refers to the tendency of a processor to access memory locations that have been accessed recently. In the less common case that a memory reference is to a "distant address", the cache memory must be loaded from another level of memory. This event, called a "**memory miss**", is rare enough that most memory references will be to addresses represented in the cache. References to addresses in the cache are called "**memory hits**"; the percentage of memory references found in the cache is called the "**hit ratio**".

It is possible, though artificial, to write programs that will not display locality and thus defeat the cache design. Most modern compilers will arrange data structures to take advantage of locality, thus putting the cache system to best use.

Effective Access Time (EAT) for Multilevel Memory

We have stated that the success of a multilevel memory system is due to the principle of locality. The measure of the effectiveness of this system is the **hit ratio**, reflected in the **effective access time** of the memory system.

We shall consider a multilevel memory system with primary and secondary memory. What we derive now is true for both cache memory and virtual memory systems. In this course, we shall use cache memory as an example. This could easily be applied to virtual memory.

In a standard memory system, an addressable item is referenced by its address. In a two level memory system, the primary memory is first checked for the address. If the addressed item is present in the primary memory, we have a **hit**, otherwise we have a **miss**. The hit ratio is defined as the number of hits divided by the total number of memory accesses; $0.0 \leq h \leq 1.0$. Given a faster primary memory with an access time T_P and a slower secondary memory with access time T_S , we compute the effective access time as a function of the hit ratio. The applicable formula is $T_E = h \cdot T_P + (1.0 - h) \cdot T_S$.

RULE: In this formula we must have $T_P < T_S$. This inequality defines the terms "primary" and "secondary". In this course T_P always refers to the cache memory.

For our first example, we consider **cache memory**, with a fast cache acting as a front-end for primary memory. In this scenario, we speak of **cache hits** and **cache misses**. The hit ratio is also called the **cache hit ratio** in these circumstances. For example, consider $T_P = 10$ nanoseconds and $T_S = 80$ nanoseconds. The formula for effective access time becomes $T_E = h \cdot 10 + (1.0 - h) \cdot 80$. For sample values of hit ratio

Hit Ratio	Access Time
0.5	45.0
0.9	17.0
0.99	10.7

The reason that cache memory works is that the principle of locality enables high values of the hit ratio; in fact $h \geq 0.90$ is a reasonable value. For this reason, a multi-level memory structure behaves almost as if it were a very large memory with the access time of the smaller and faster memory. Having come up with a technique for speeding up our large monolithic memory, we now investigate techniques that allow us to fabricate such a large main memory.

Cache Memory Organization

We now turn our attention to strategies for organizing data in a cache. While this discussion is cast in terms of a single-level cache, the basic principles apply to every level in a multi-level cache. In this section, we use the term “**memory**”, sometimes “**secondary memory**”, to refer to the memory attached to the cache. It is possible that this memory is either the primary DRAM or a slower and larger cache

The mapping of the secondary memory to the smaller cache is “many to one” in that each cache block can contain a number of secondary memory addresses. To compensate for each of these, we associate a **tag** with each cache block, also called a “**cache line**”.

For example, consider a byte-addressable memory with 24-bit addresses and 16 byte blocks. The memory address would have six hexadecimal digits. Consider the 24-bit address 0xAB7129. The block containing that address contains every item with address beginning with 0xAB712: 0xAB7120, 0xAB7121, ..., 0xAB7129, 0xAB712A, ... 0xAB712F.

We should point out immediately that the secondary memory will be divided into blocks of size identical to the cache line. If the secondary memory has 16-byte blocks, this is due to the organization of the cache as having cache lines holding 16 bytes of data.

The primary block would have 16 entries, indexed 0 through F. It would have the 20-bit tag 0xAB712 associated with the block, either explicitly or implicitly.

At system start-up, the faster cache contains no valid data, which are copied as needed from the slower secondary memory. Each block would have three fields associated with it

The tag field	identifying the memory addresses contained
Valid bit	set to 0 at system start-up. set to 1 when valid data have been copied into the block
Dirty bit	set to 0 at system start-up. set to 1 whenever the CPU writes to the faster memory set to 0 whenever the contents are copied to the slower memory.

The basic unit of a cache is called a “**cache line**”, which comprises the data copied from the slower secondary memory and the required ID fields. A 16-KB cache might contain 1,024 cache lines with the following structure.

D bit	V Bit	Tag	16 indexed entries (16 bytes total)
0	1	0xAB712	$M[0xAB7120] \dots M[0xAB712F]$

We now face a problem that is unique to cache memories. How do we find an addressed item? In the primary memory, the answer is simple; just go to the address and access the item. The

cache has much fewer addressable entities than the secondary memory. For example, this cache has 16 kilobytes set aside to store a selection of data from a 16 MB memory. It is not possible to assign a unique address for each possible memory item.

The choice of where in the cache to put a memory block is called the **placement problem**. The method of finding a block in the cache might be called the location problem. We begin with the simplest placement strategy. When a memory block is copied into a cache line, just place it in the first available cache line. In that case, the memory block can be in any given cache line. We now have to find it when the CPU references a location in that block.

The Associative Cache

The most efficient search strategy is based on **associative memory**, also called **content addressable memory**. Unlike sequential searches or binary search on an array, the contents of an associative memory are all searched at the same time. In terminology from the class on algorithm analysis, it takes one step to search an associative memory.

Consider an array of 256 entries, indexed from 0 to 255 (or 0x0 to 0xFF). Suppose that we are searching the memory for entry 0xAB712. **Normal memory** would be searched using a standard search algorithm, as learned in beginning programming classes. If the memory is unordered, it would take on average 128 searches to find an item. If the memory is ordered, binary search would find it in 8 searches.

Associative memory would find the item in one search. Think of the control circuitry as “broadcasting” the data value (here 0xAB712) to all memory cells at the same time. If one of the memory cells has the value, it raises a Boolean flag and the item is found.

We do not consider duplicate entries in the associative memory. This can be handled by some rather straightforward circuitry, but is not done in associative caches. We now focus on the use of associative memory in a cache design, called an “**associative cache**”.

Assume a number of cache lines, each holding 16 bytes. Assume a 24-bit address. The simplest arrangement is an **associative cache**. It is also the hardest to implement.

Divide the 24-bit address into two parts: a 20-bit tag and a 4-bit offset. The 4-bit offset is used to select the position of the data item in the cache line.

Bits	23 – 4	3 – 0
Fields	Tag	Offset

A cache line in this arrangement would have the following format.

D bit	V Bit	Tag	16 indexed entries
0	1	0xAB712	M[0xAB7120] ... M[0xAB712F]

The placement of the 16 byte block of memory into the cache would be determined by a cache line **replacement policy**. The policy would probably be as follows:

1. First, look for a cache line with $V = 0$. If one is found, then it is “empty” and available, as nothing is lost by writing into it.
2. If all cache lines have $V = 1$, look for one with $D = 0$. Such a cache line can be overwritten without first copying its contents back to main memory.

When the CPU issues an address for memory access, the cache logic determines the part that is to be used for the cache line tag (here 0xAB712) and performs an associative search on the tag part of the cache memory. Only the tag memory in an associative cache is set up as true associative memory; the rest is standard SRAM. One might consider the associative cache as two parallel memories, if that helps.

After one clock cycle, the tag is either found or not found. If found, the byte is retrieved. If not, the byte and all of its block are fetched from the secondary memory.

The Direct Mapped Cache

This strategy is simplest to implement, as the cache line index is determined by the address. Assume 256 cache lines, each holding 16 bytes. Assume a 24-bit address. Recall that $256 = 2^8$, so that we need eight bits to select the cache line.

Divide the 24-bit address into three fields: a 12-bit explicit tag, an 8-bit line number, and a 4-bit offset within the cache line. Note that the 20-bit memory tag is divided between the 12-bit cache tag and 8-bit line number.

Bits	23 – 12	11 – 4	3 – 0
Cache View	Tag	Line	Offset
Address View	Block Number		Offset

Consider the address 0xAB7129. It would have

Tag = 0xAB7
 Line = 0x12
 Offset = 0x9

Again, the cache line would contain M[0xAB7120] through M[0xAB712F]. The cache line would also have a V bit and a D bit (Valid and Dirty bits). This simple implementation often works, but it is a bit rigid. Each memory block has one, and only one, cache line into which it might be placed. A design that is a blend of the associative cache and the direct mapped cache might be useful.

An **N-way set-associative cache** uses direct mapping, but allows a set of N memory blocks to be stored in the line. This allows some of the flexibility of a fully associative cache, without the complexity of a large associative memory for searching the cache.

Suppose a 2-way set-associative implementation of the same cache memory. Again assume 256 cache lines, each holding 16 bytes. Assume a 24-bit address. Recall that $256 = 2^8$, so that we need eight bits to select the cache line. Consider addresses 0xCD4128 and 0xAB7129. Each would be stored in cache line 0x12. Set 0 of this cache line would have one block, and set 1 would have the other.

Entry 0				Entry 1			
D	V	Tag	Contents	D	V	Tag	Contents
1	1	0xCD4	M[0xCD4120] to M[0xCD412F]	0	1	0xAB7	M[0xAB7120] to M[0xAB712F]

Examples of Cache Memory

We need to review cache memory and work some specific examples. The idea is simple, but fairly abstract. We must make it clear and obvious. To review, we consider the main memory of a computer. This memory might have a size of 384 MB, 512 MB, 1GB, etc. It is divided into blocks of size 2^K bytes, with $K > 2$.

In general, the N-bit address is broken into two parts, a block tag and an offset.

The most significant (N – K) bits of the address are the block tag

The least significant K bits represent the offset within the block.

We use a specific example for clarity.

We have a byte addressable memory, with a 24-bit address.

The cache block size is 16 bytes, so the offset part of the address is $K = 4$ bits.

In our example, the address layout for main memory is as follows:

Divide the 24-bit address into two parts: a 20-bit tag and a 4-bit offset.

Bits	23 – 4	3 – 0
Fields	Tag	Offset

Let's examine the sample address, **0xAB7129**, in terms of the bit divisions above.

Bits:	23 – 20	19 – 16	15 – 12	11 – 8	7 – 4	3 – 0
Hex Digit	A	B	7	1	2	9
Field	0xAB712					0x09

So, the tag field for this block contains the value 0xAB712. The tag field of the cache line must also contain this value, either explicitly or implicitly. It is the cache line size that determines the size of the blocks in main memory. They must be the same size, here 16 bytes.

All cache memories are divided into a number of cache lines. This number is also a power of two. Our example has 256 cache lines. Where in the cache is the memory block placed?

Associative Cache

As a memory block can go into any available cache line, the cache tag must represent the memory tag explicitly: Cache Tag = Block Tag. In our example, it is 0xAB712.

Direct Mapped and Set-Associative Cache

For any specific memory block, there is exactly one cache line that can contain it.

Suppose an N-bit address space. 2^L cache lines, each of 2^K bytes.

Address Bits	(N – L – K) bits	L bits	K bits
Cache Address	Cache Tag	Cache Line	Offset
Memory Address	Memory Block Tag		Offset

To retrieve the memory block tag from the cache tag, just append the cache line number.

In our example: The Memory Block Tag = 0xAB712
 Cache Tag = 0xAB7
 Cache Line = 0x12

Reading From and Writing to the Cache

Let's begin our review of cache memory by considering the two processes: CPU Reads from Cache and CPU Writes to Cache.

Suppose for the moment that we have a **direct mapped cache**, with line 0x12 as follows:

Tag	Valid	Dirty	Contents (Array of 16 entries)
0xAB7	1	0	M[0xAB7120] to M[0xAB712F]

Since the cache line has contents, by definition we must have **Valid = 1**. For this example, we assume that Dirty = 0 (but that is almost irrelevant here).

Read from Cache.

The CPU loads a register from address 0xAB7123. This is read directly from the cache.

Write to Cache

The CPU copies a register into address 0xAB712C. The appropriate page is present in the cache line, so the value is written and the dirty bit is set; **Dirty = 1**. Note that the dirty bit is not tested, it is just set to 1. All that matters is that there has been at least one write access to this cache line.

Here is a question that cannot occur for reading from the cache. Writing to the cache has changed the value in the cache. The cache line now differs from the corresponding block in main memory. Eventually, the value written to the cache line must be copied back to the secondary memory, or the new value will be lost. The two main solutions to this problem are called "write back" and "write through".

Write Through

In this strategy, every byte that is written to a cache line is immediately written back to the corresponding memory block. Allowing for the delay in updating main memory, the cache line and cache block are always identical. The advantage is that this is a very simple strategy. No "dirty bit" needed. The disadvantage in the simple implementation is that writes to cache

proceed at main memory speed. Many modern primary memories now have a write queue, which is a fast memory containing entries to be written to the slower memory. As long as the queue does not fill, it can accept data at cache speeds.

Write Back

In this strategy, CPU writes to the cache line do not automatically cause updates of the corresponding block in main memory.

The cache line is written back only when it is replaced. The advantage of this is that it is a faster strategy. Writes always proceed at cache speed. Furthermore, this plays on the locality theme. Suppose each entry in the cache is written, a total of 16 cache writes. At the end of this sequence, the cache line will eventually be written to the slower memory. This is one slow memory write for 16 cache writes. The disadvantage of this strategy is that it is more complex, requiring the use of a dirty bit.

Cache Line Replacement

Assume that memory block 0xAB712 is present in cache line 0x12. We now get a memory reference to address 0x895123. This is found in memory block 0x89512, which must be placed in cache line 0x12. The following holds for both a memory read from or memory write to 0x895123. The process is as follows.

1. The valid bit for cache line 0x12 is examined. If (Valid = 0), there is nothing in the cache line, so go to Step 5.
2. The memory tag for cache line 0x12 is examined and compared to the desired tag 0x895. If (Cache Tag = 0x895) go to Step 6.
3. The cache tag does not hold the required value. Check the dirty bit. If (Dirty = 0) go to Step 5.
4. Here, we have (Dirty = 1). Write the cache line back to memory block 0xAB712.
5. Read memory block 0x89512 into cache line 0x12. Set Valid = 1 and Dirty = 0.
6. With the desired block in the cache line, perform the memory operation.

We have three different major strategies for cache mapping.

Direct Mapping is the simplest strategy, but it is rather rigid. One can devise “almost realistic” programs that defeat this mapping. It is possible to have considerable page replacement with a cache that is mostly empty.

Fully Associative offers the most flexibility, in that all cache lines can be used. This is also the most complex, because it uses a larger associative memory, which is complex and costly.

N-Way Set Associative is a mix of the two strategies. It uses a smaller (and simpler) associative memory. Each cache line holds $N = 2^k$ sets, each the size of a memory block. Each cache line has N cache tags, one for each set.

Consider variations of mappings to store 256 memory blocks.


Direct Mapped Cache 256 cache lines

“1-Way Set Associative”	256 cache lines	1 set per line
2-Way Set Associative	128 cache lines	2 sets per line
4-Way Set Associative	64 cache lines	4 sets per line
8-Way Set Associative	32 cache lines	8 sets per line
16-Way Set Associative	16 cache lines	16 sets per line
32-Way Set Associative	8 cache lines	32 sets per line
64-Way Set Associative	4 cache lines	64 sets per line
128-Way Set Associative	2 cache lines	128 sets per line
256-Way Set Associative	1 cache line	256 sets per line
Fully Associative Cache		256 sets

Cache Memory in Modern Computer Systems

The above discussion of a single level cache attached to main memory is sufficient to illustrate the main ideas behind cache memory. Modern computer systems have gone far beyond this simple design. We now jump into reality.


Almost all modern computer systems have either a two-level (L1 and L2) or three-level (L1, L2, and L3) cache system. Those that do not, such as the CPU for the IBM z/10, have a four-level cache. Furthermore, all modern designs have a “**split cache**” for the level 1; there is an I-cache and D-cache (Instruction Cache and Data Cache) at this level. In order to illustrate the advantages of these designs, we assume the following two-level design, which is based on the actual structure found in early Pentium designs.

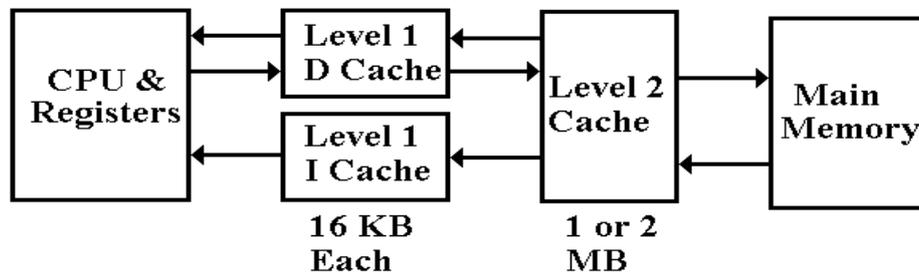

We now address two questions for this design before addressing the utility of a third level in the cache. The first question is why the L1 cache is split into two parts. The second question is why the cache has two levels. Suffice it to say that each design decision has been well validated by empirical studies; we just give a rationale.

There are several reasons to have a split cache, either between the CPU and main memory or between the CPU and a higher level of cache. One advantage is the “one way” nature of the L1 Instruction Cache; the CPU cannot write to it. This means that the I-Cache is simpler and faster than the D-Cache; faster is always better. In addition, having the I-Cache provides some security against self modifying code; it is difficult to change an instruction just fetched and write it back to main memory. There is also slight security against execution of data; nothing read through the D-Cache can be executed as an instruction.

The primary advantage of the split level-1 cache is support of a modern pipelined CPU. A pipeline is more akin to a modern assembly line. Consider an assembly line in an auto plant. There are many cars in various stages of completion on the same line. In the CPU pipeline, there are many instructions (generally 5 to 12) in various stages of execution. Even in the simplest design, it is almost always the case that the CPU will try to fetch an instruction in the same clock cycle as it attempts to read data from memory or write data to memory.

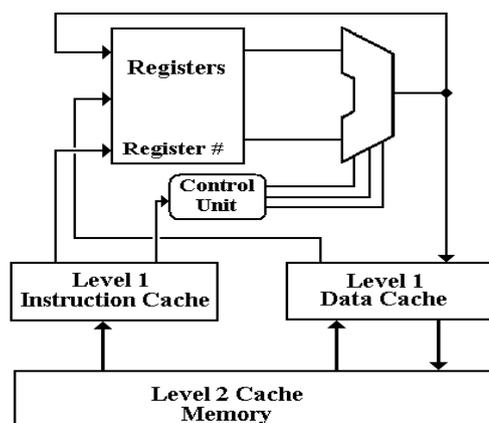

Here is a schematic of the pipelined CPU for the MIPS computer [R007].

This shows two of the five stages of the MIPS pipeline. In any one clock period, the control unit will access the Level 1 I-Cache and the ALU might access the L1 D-Cache. As the I-Cache and D-Cache are separate memories, they can be accessed at the same time with no conflict.

We note here that the ALU does not directly access the D-Cache; it is the control unit either feeding data to a register or writing the output from the ALU to primary memory, through the D-Cache. The basic idea is sound: two memory accesses per clock tick.

There is one slight objection possible to the split-cache design. As we noted above, increasing the hit rate on a cache memory results in faster access to the contents of both that cache and, indirectly, the memory being served by that cache. It should be obvious that the cache hit rate is

lower for each of the smaller split L1 caches that it would be for a larger combined L1 cache. Empirical data suggests that the advantage of simultaneous access to both instructions and data easily overcomes the disadvantage of the slightly increased miss rate. Practical experience with CPU design validates these empirical data.

The next question relates to the multiplicity of cache levels. Why have a 64-KB L1 cache and a 1-MB (1,024 KB) L2 cache in preference to a 1,092-KB unified cache. Here is an answer based on data for the Apple iMAC G5, as reported in class lectures by David Patterson [R035]. The access times and sizes for the various memory levels are as follows:

	Registers	L1 I-Cache	L1 D-Cache	L2 Cache	DRAM
Size	1 KB	64 KB	32 KB	512 KB	256 MB
Access Time	0.6 ns	1.9 ns	1.9 ns	6.9 ns	55 ns

The basic point is that smaller caches have faster access times. This, coupled with the principle of locality implies that the two-level cache will have better performance than a larger unified cache. Again, industrial practice has born this out.

The utility of a multi-level cache is illustrated by the following example, based on the access times given in the previous table.

Suppose the following numbers for each of the three memory levels.

L1 Cache Access Time = 0.60 nanoseconds Hit rate = 95%
 L2 Cache Access Time = 1.90 nanoseconds Hit rate = 98%
 Main Memory Access Time = 55.0 nanoseconds.

The one-level cache would be implemented with the access time and hit rate of the L2 cache, as the one-level cache would be that size. The effective access time is thus:

$$T_E = 0.98 \cdot 1.90 + (1 - 0.98) \cdot 55.0 = 0.98 \cdot 1.90 + 0.02 \cdot 55.0 = 1.862 + 1.10 = 2.972.$$

The two-level cache would use the L1 and L2 caches above and have access time:

$$T_E = 0.95 \cdot 0.60 + (1 - 0.95) \cdot [0.98 \cdot 1.90 + (1 - 0.98) \cdot 55.0]$$

$$= 0.95 \cdot 0.60 + 0.05 \cdot 2.972 = 0.570 + 0.1486 = 0.719 \text{ nanoseconds.}$$

The two-level cache system is about four times faster than the bigger unified cache.

Cache and Multi-Core Processors

The goal of every CPU design is to increase performance according to some type of relevant benchmark. One way to do this is to increase the clock rate of the CPU. Another way to do this is to add more cache memory on the CPU chip. As transistor densities increase, both options appear to be appealing. There is, however, a problem with each of the options; as each increases, the power density on the chip increases and the chip temperature climbs into a range not compatible with stable operation.

One way to handle this heat problem is to devote more of the chip to cache memory and less to computation. As noted by Stallings [R033], "Memory transistors are smaller and have a power density an order of magnitude lower than logic. ... the percentage of the chip area devoted to memory has grown to exceed 50% as the chip transistor density has increased."

Here is a diagram of a quad-core Intel Core i7 CPU. Each core has its own L1 caches as well as dedicated L2 cache. The four cores share an 8-MB Level 3 cache.


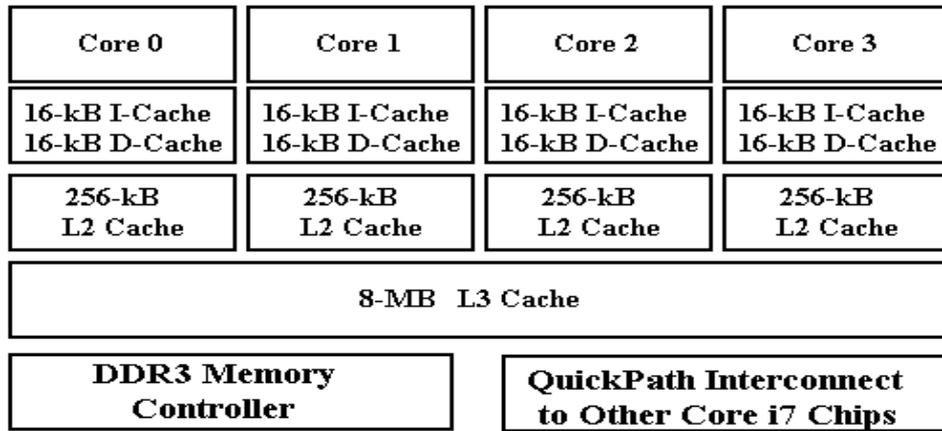


Figure: Intel Core i7 Block Diagram

Virtual Memory

We now turn to the next example of a memory hierarchy, one in which a magnetic disk normally serves as a “backing store” for primary core memory. This is virtual memory. While many of the details differ, the design strategy for virtual memory has much in common with that of cache memory. In particular, VM is based on the idea of program locality.


Virtual memory has a precise definition and a definition implied by common usage. We discuss both. Precisely speaking, virtual memory is a mechanism for translating **logical addresses** (as issued by an executing program) into actual physical **memory addresses**. The address translation circuitry is called a **MMU (Memory Management Unit)**.

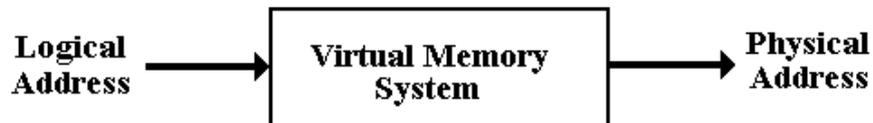

This definition alone provides a great advantage to an **Operating System**, which can then allocate processes to distinct physical memory locations according to some optimization. This has implications for security; individual programs do not have direct access to physical memory. This allows the OS to protect specific areas of memory from unauthorized access.

Virtual Memory in Practice

Although this is not the definition, virtual memory has always been implemented by pairing a fast DRAM Main Memory with a bigger, slower “backing store”. Originally, this was magnetic drum memory, but it soon became magnetic disk memory. Here again is the generic two-stage memory diagram, this time focusing on virtual memory.

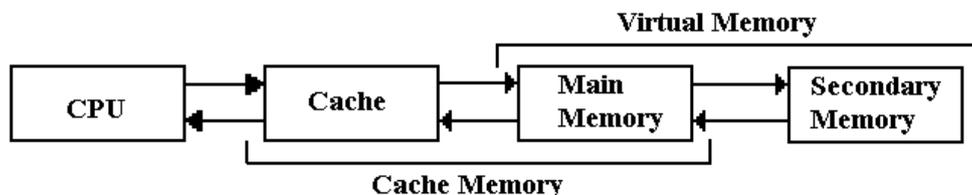

The invention of **time-sharing operating systems** introduced another variant of VM, now part of the common definition. A program and its data could be “swapped out” to the disk to allow another program to run, and then “swapped in” later to resume.

Virtual memory allows the program to have a logical address space much larger than the computers physical address space. It maps logical addresses onto physical addresses and moves “**pages**” of memory between disk and main memory to keep the program running.

An **address space** is the range of addresses, considered as unsigned integers, that can be generated. An N -bit address can access 2^N items, with addresses $0 \dots 2^N - 1$.

16-bit address 2^{16} items	0 to	65535
20-bit address 2^{20} items	0 to	1,048,575
32-bit address 2^{32} items	0 to	4,294,967,295

In all modern applications, the physical address space is no larger than the logical address space. It is often somewhat smaller than the logical address space. As examples, we use a number of machines with 32-bit logical address spaces.

Machine	Physical Memory	Logical Address Space
VAX-11/780	16 MB	4 GB (4,096 MB)
Pentium (2004)	128 MB	4 GB
Desktop Pentium	512 MB	4 GB
Server Pentium	4 GB	4 GB
IBM z/10 Mainframe	384 GB	2^{64} bytes = 2^{34} GB

Organization of Virtual Memory

Virtual memory is organized very much in the same way as cache memory. In particular, the formula for effective access time for a two-level memory system (pages 381 and 382 of this text) still applies. The **dirty bit** and **valid bit** are still used, with the same meaning. The names are different, and the timings are quite different. When we speak of virtual memory, we use the terms “**page**” and “**page frame**” rather than “**memory block**” and “**cache line**”. In the virtual memory scenario, a page of the address space is copied from the disk and placed into an equally sized page frame in main memory.

Another minor difference between standard cache memory and virtual memory is the way in which the memory blocks are stored. In cache memory, both the tags and the data are stored in a single fast memory called the cache. In virtual memory, each page is stored in main memory in a place selected by the operating system, and the address recorded in a page table for use of the program.

Here is an example based on a configuration that runs through this textbook. Consider a computer with a 32-bit address space. This means that it can generate 32-bit logical addresses. Suppose that the memory is byte addressable, and that there are 2^{24} bytes of physical memory, requiring 24 bits to address. The logical address is divided as follows:

Bits	31 – 28	27 – 24	23 – 20	19 – 16	15 – 12	11 – 8	7 – 4	3 – 0
Field	Page Number					Offset in Page		

The physical address associated with the page frame in main memory is organized as follows

Bits	23 – 20	19 – 16	15 – 12	11 – 8	7 – 4	3 – 0
Field	Address Tag			Offset in Page Frame		

Virtual memory uses the **page table** to translate virtual addresses into physical addresses. In most systems, there is one page table per process. Conceptually, the page table is an array, indexed by page frame of the address tags associated with each process. But note that such an array can be larger than the main memory itself. In our example, each address tag is a 12-bit value, requiring two bytes to store, as the architecture cannot access fractional bytes. The page number is a 20-bit number, from 0 through 1,048,575. The full page table would require two megabytes of memory to store.

Each process on a computer will be allocated a small page table containing mappings for the most recently used logical addresses. Each table entry contains the following information:

1. The valid bit, which indicates whether or not there is a valid address tag (physical page number) present in that entry of the page table.
2. The dirty bit, indicating whether or not the data in the referenced page frame has been altered by the CPU. This is important for page replacement policies.
3. The 20-bit page number from the logical address, indicating what logical page is being stored in the referenced page frame.
4. The 12-bit unsigned number representing the address tag (physical page number).

More on Virtual Memory: Can It Work?

Consider again the virtual memory system just discussed. Each memory reference is based on a logical address, and must access the page table for translation.

This is where the **TLB (Translation Look-aside Buffer)** comes in. It is a cache for a page table, more accurately called the “**Translation Cache**”.

The TLB is usually implemented as a split associative cache.

- One associative cache for instruction pages, and
- One associative cache for data pages.

A page table entry in main memory is accessed only if the TLB has a miss.

The Complete Page Table Structure

All page tables are under the control of the Operating System, which creates a page table for each process that is loaded into memory. The computer hardware will provide a single register, possibly called **PTA (Page Table Address)** that contains the address of the page table for each process, along with other information.

Each page table, both the master table and each process table, has contents that vary depending on the value in the valid bit.

If Valid = 1, the contents are the 12-bit address tag.

If Valid = 0, the contents are the disk address of the page as stored on disk.

As the above implies, the page table for a given process may be itself virtualized; that is mostly stored in virtual memory. Only a small part of a processes full page table must be in physical memory for fast access. Of that, a smaller part is in the TLB for faster access.

Virtual Memory with Cache Memory

Any modern computer supports both virtual memory and cache memory. We now consider the interaction between the two.

The following example will illustrate the interactions. Consider a computer with a 32-bit address space. This means that it can generate 32-bit logical addresses. Suppose that the memory is byte addressable, and that there are 2^{24} bytes of physical memory, requiring 24 bits to address. The logical address is divided as follows:

Bits	31 – 28	27 – 24	23 – 20	19 – 16	15 – 12	11 – 8	7 – 4	3 – 0
Field	Page Number					Offset in Page		

We suppose further that virtual memory implemented using page sizes of $2^{12} = 4096$ bytes, and that cache memory implemented using a fully associative cache with cache line size of 16 bytes. The physical address is divided as follows:

Bits	23 – 20	19 – 16	15 – 12	11 – 8	7 – 4	3 – 0
Field	Memory Tag					Offset

Consider a memory access, using the virtual memory. Conceptually, this is a two–step process. First, the logical address is mapped into a physical address using the virtual memory system. Then the physical address is sent to the cache system to determine whether or not there is a cache hit.


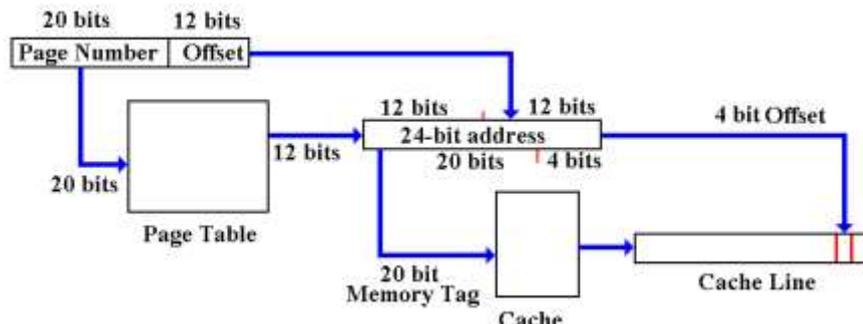



Figure: Two–Stage Virtual Address Translation

The Virtually Mapped Cache

One solution to the inefficiencies of the above process is to use a **virtually mapped cache**. In our example we would use the high order 28 bits as a virtual tag. If the addressed item is in the cache, it is found immediately.

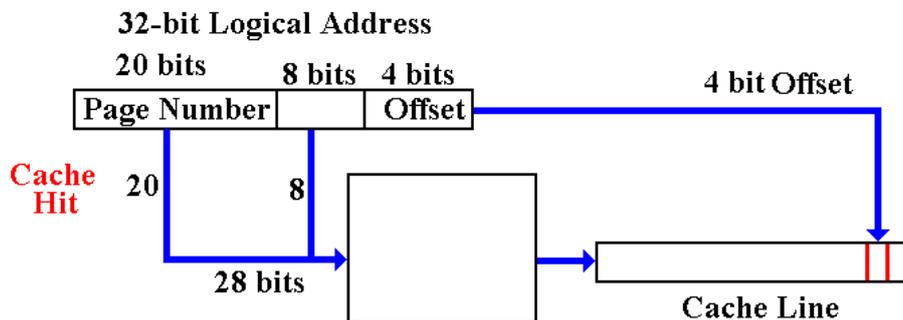

A Cache Miss accesses the Virtual Memory system.

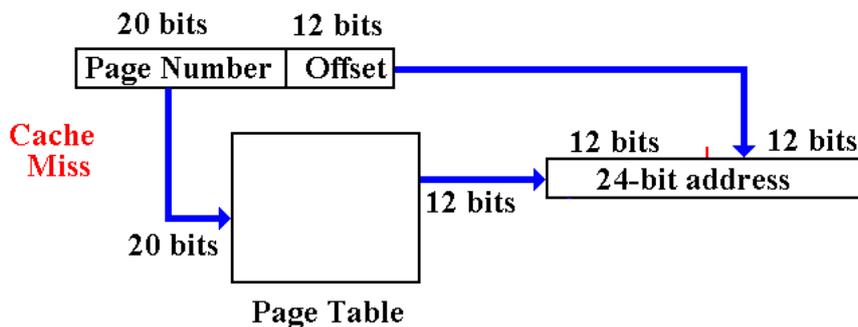

The Problem of Memory Aliasing

While the virtually mapped cache presents many advantages, it does have one notable drawback when used in a multiprogramming environment. In such an environment, a computer might be simultaneously executing more than one program. In the real sense, only one program at a time is allocated to any CPU. Thus, we might have what used to be called “**time sharing**”, in which a CPU executes a number of programs in sequence. There is a provision in such a system for two or more cooperating processes to request use of the same physical memory space as a mechanism for communication. If two or more processes have access to the same physical page frame, this is called **memory aliasing**. In such scenarios, simple VM management systems will fail. This problem can be handled, as long as one is aware of it.

The topic of **virtual memory** is usually found in a course on **Operating Systems**.

DR. M.A. EL-DOSUKY
Faculty of Computer and Info, Mansoura University

HOME ▾ RESEARCH ▾ TEACHING ▾ SOFTWARE ▾ MEDIA ▾ PEOPLE ▾ FAMILY

▾ Theory Courses

Other courses

▾ Programming Courses

Computer Architecture and Organization

▾ Systems Courses

Operating systems

Operating systems II

▾ AI & Robotics Courses

AI & Robotics, cache coherence, embedded systems.

▾ Research Workshops

Lec 01 (28-09-2015)

Computer Arch and Organization

Files :

ob-computer-history-Turing-machine.pdf

ob-computer-machines.pdf

oc-Organization-vs-Architecture.pdf

▾ Problem Solving

▾ Entrepreneurship

» Courses

» Artificial intelligence

» Robotics

» Algorithms

» Data Structures

» Discrete Math

» Mathematical Logic

Lec 02 (05-10-2015)

Digital logic

Files :

Digital-logic.pdf

References

- Edward L. Bosworth, Ph.D., Design and Architecture of Digital Computers: An Introduction, TSYS School of Computer Science
- Avi Silberschatz, Operating System Concepts - 8th edition